



PS-1206U



PS-1206P



Fast Ethernet USB / Parallel Print Server



Broad Selection of Printing Methods

The PS-1206U/P print server supports a wide selection of printing protocols such as LPR, IPP, SMB/TCP and RAW printing. They can also work with different network protocols like, TCP/IP, IPX/SPX, NetBEUI, and Apple Talk. This gives you a variety of printing methods to choose from based on your requirements.

Double-purposed DHCP Server/Client

The printer server can act as a DHCP server that lets your LAN clients to automatically obtain an IP address. It can also act as a DHCP client allowing easy integration to your existing network.

Fault-Tolerant Firmware Upgrades

Now, users need not worry about errors occurring in the midst of an upgrade that may subsequently stop its operations. The PS-1206U/P print server incorporates a fault-tolerant upgrade function that permits re-upgrading of the device should problems occur during the initial or previous upgrade session.

User-friendly Setup CD Wizard and Driver*

To facilitate connection to your printer the PS-1206U/P include a user-friendly EZmax setup wizard. Its easy-to-use windows installation wizard simplifies and enhances driver installation for immediate use of the device. An add-on feature allows you to conveniently configure these print servers from any network client that support web-browsing.


* The EZmax Setup CD Wizard only supports Edimax print servers.

FEATURES AND TECHNICAL SPECIFICATIONS

- Complies with IEEE 802.3/802.3u standards
- Includes multilingual EZmax Setup Wizard
- Shares one USB printer* with network users (PS-1206U only)
- Shares one parallel printer* with network users (PS-1206P only)
- Supports TCP/IP, IPX/SPX, NetBEUI and Apple Talk protocols
- Supports LPR, IPP, SMB/TCP and RAW printing protocols
- Supports DHCP Server and Client protocols
- Supports Auto MDI/MDI-X
- Compatible with Windows 2000/XP/Vista, MAC OS 10.4.x and above

STANDARDS & HARDWARE INTERFACE	CPU / MEMORY	POWER ADAPTER
<ul style="list-style-type: none"> • IEEE802.3, IEEE802.3u • Complies with IEEE 802.3/802.3u standards • One USB port (PS-1206U only) • One Parallel port (PS-1206P only) • One 10/100Mbps LAN port • Reset button 	<ul style="list-style-type: none"> • RISC CPU • 512K NOR Flash • 2MB SDRAM 	<ul style="list-style-type: none"> • 7.5VDC / 0.5A
INSTALLATION & MANAGEMENT KIT	LED Indicators	HUMIDITY & TEMPERATURE
<ul style="list-style-type: none"> • Multilingual EZmax Setup Wizard • Admin Utility included • Web Management • Firmware upgrade utility 	<ul style="list-style-type: none"> • READY • STATUS • LAN 	<ul style="list-style-type: none"> • 10~90% (Non-condensing) • 0~55°C
SYSTEM REQUIREMENTS	DIMENSIONS	CERTIFICATIONS
<ul style="list-style-type: none"> • CPU: Pentium III 1G above or similar • Memory size: 256MB RAM • One CD-ROM drive • Hard Disk: Min. of 100MB disk space • USB / Parallel Printer • Fast Ethernet network 	<ul style="list-style-type: none"> • 62 (W) x 22 (H) x 77 (D) mm 	<ul style="list-style-type: none"> • CE, FCC

TYPICAL SETUP DIAGRAM AND RELATED PRODUCTS

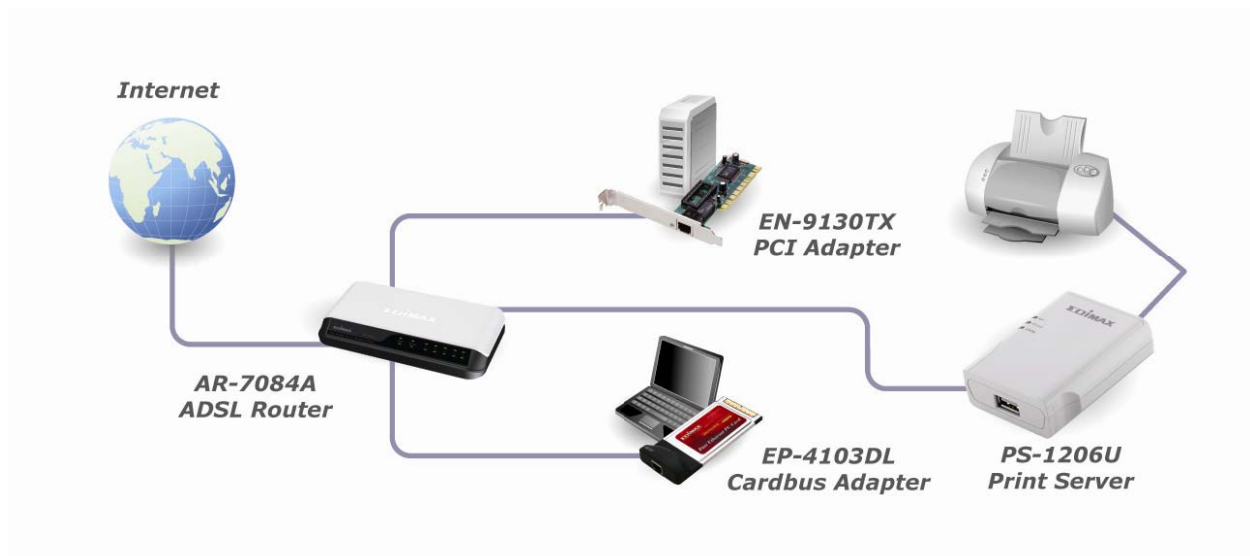

* Please check the list of compatible printers before you make your purchase.